

**WMX**  
**MP**



WMX-SM-15-30W



WMX-MD-20-50W  
WMX-MD-20-80W



WMX-LG-50-120W

- OPTIONS**
- PHOTOCELL**
- MOTION SENSOR**
- BATTERY BACKUP**
- FIXTURE COLOR**




Shown with Optional Shroud  
See Page A27

**TECHNICAL SPECIFICATIONS:**

- :: ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- :: Multi Power (Switch is inside fixture)
- :: Prismatic Borosilicate Glass Lens
- :: Voltage: 120-277V
- :: Four 1/2" hubs: 1 top, 1 on each side, 1 rear
- :: Chip: Philips Lumileds LEDs
- :: Lumens: 130LM/W
- :: CRI: >70
- :: Power Factor: 90%
- :: Operating Temp: -40°F ~ 104°F
- :: 70,000 hour rated life
- :: 7-year warranty
- :: Suitable for Wet Locations, IP65

**APPLICATIONS:**

- :: Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- :: Replace existing HID wall packs
- :: Great for use with photocell

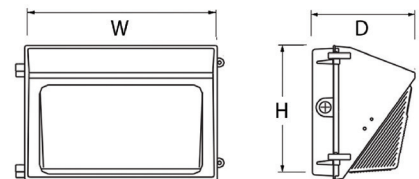

**LED TUNEABLE NON-CUTOFF WALL PACKS**

CATALOG NO.	WATTS	LPW	COLOR TEMP	DIMENSIONS
WMX-SM-15-30W-30K	15W/20W/25W/30W	130 LPW	3000K	8 1/2"(W) x 9"(H) x 7 1/4"(D)
WMX-SM-15-30W-40K	15W/20W/25W/30W	130 LPW	4000K	8 1/2"(W) x 9"(H) x 7 1/4"(D)
WMX-SM-15-30W-50K	15W/20W/25W/30W	130 LPW	5000K	8 1/2"(W) x 9"(H) x 7 1/4"(D)
WMX-MD-20-50W-30K	20W/30W/50W/60W	130 LPW	3000K	15 1/4"(W) x 9 1/2"(H) x 7 1/2"(D)
WMX-MD-20-50W-40K	20W/30W/50W/60W	130 LPW	4000K	15 1/4"(W) x 9 1/2"(H) x 7 1/2"(D)
WMX-MD-20-50W-50K	20W/30W/50W/60W	130 LPW	5000K	15 1/4"(W) x 9 1/2"(H) x 7 1/2"(D)
WMX-MD-20-80W-30K	20W/40W/60W/80W	130 LPW	3000K	15 1/4"(W) x 9 1/2"(H) x 7 1/2"(D)
WMX-MD-20-80W-40K	20W/40W/60W/80W	130 LPW	4000K	15 1/4"(W) x 9 1/2"(H) x 7 1/2"(D)
WMX-MD-20-80W-50K	20W/40W/60W/80W	130 LPW	5000K	15 1/4"(W) x 9 1/2"(H) x 7 1/2"(D)
WMX-LG-50-120W-30K	50W/80W/100W/120W	130 LPW	3000K	18 1/4"(W) x 9"(H) x 9 1/4"(D)
WMX-LG-50-120W-40K	50W/80W/100W/120W	130 LPW	4000K	18 1/4"(W) x 9"(H) x 9 1/4"(D)
WMX-LG-50-120W-50K	50W/80W/100W/120W	130 LPW	5000K	18 1/4"(W) x 9"(H) x 9 1/4"(D)