


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

## DIMENSIONS:

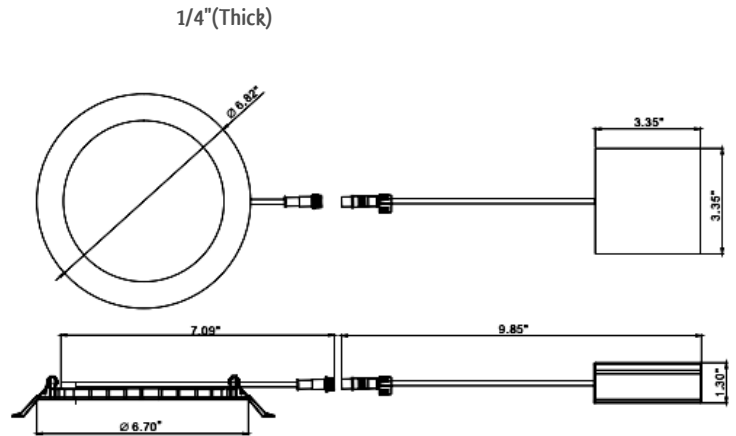

Junction box 1" thick included with fixture

## RSL6-MCT5

### 6" LED 5CCT ULTRA SLIM RECESSED LIGHT

Ideal for New as well as old residential and commercial constructions.

#### ELECTRICAL SPECIFICATIONS:

- Voltage: 120VAC
- Wattage: 15W
- Power factor: >0.90
- Efficacy: 75~80LM/W
- Class 2 Driver

#### HOUSING SPECIFICATIONS:

- 1/4" Thick
- Die-cast Aluminum with white powder coat finish
- Pot light housing is not required even for insulated ceiling
- Junction box 1" thick included with fixture
- Type IC rated: Approved for direct contact with insulation
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50,000 hrs.
- Air-tight and damp location approved

#### CERTIFICATIONS: ETL,ES



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
RSL6-MCT5	15W	120VAC	1125LM	Multi Color Temp. 27K/30K/35K/40K/50K

#### OPTIONAL ACCESSORIES:



RSL-EXT-10FT



RSL6-RI/RSL4-RI-13

MODEL	DESCRIPTION
RSL-EXT-10FT-MCT	10 Ft. Extension Cable For use with all MCT Slim Light
RSL6-RI-13	6" Round Rough-in Plate, 13" Long
RSL6-RI	6" Round Rough-in Plate, 26" Long

#### LIGHTING SPECIFICATIONS:

- Dimming: dimmable
- Lens: 0.125" white translucent acrylic
- Optics: White translucent acrylic
- LED: Seoul DOB (Driver On Board) Technology
- Total lumens: 1125LM
- Color temperature: MCT: 2700K/3000K/3500K/4000K/5000K
- Color rendering index: >80
- Beam Angle: 100° -110°

#### WARRANTY: 5 years



JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

**RSL6-MCT5**

**LED ULTRA SLIM RECESSED LIGHTS**

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
RSL6-MCT5	15W	120VAC	1125LM	Multi Color Temp.

**BRAND OF DIMMERS:**

NO.	BRAND	MODEL
1	Leviton	6631-1LT
2	Lutron	MACL-153MLH-AL
3	Lutron	TGCL-153PH-LA
4	Lutron	DVW-603PGH-WH
5	Lutron	CT-600PR-WH
6	Lutron	LGCL-153PHL-IV
7	Lutron	TGCL-153PH-LA
8	Lutron	LSLV603PWV
9	Leviton	6674-POW
10	Lutron	DVCL-153P
11	Lutron	MSCL-OP153P
12	Lutron	CTCL-153P
13	Lutron	MACL-153M
14	Pass & Seymour	HCL453PTCCCV6
15	Pass & Seymour	LSLV603PWV

