

# RLF-8822

8" ROUND LED ULTRA SLIM  
SLIM DOWNLIGHTS WITH WHITE TRIM



Fixture Type
Project
Notes



RLF-8822-SW5-WH



RLF-8822-SW5-WH complete set

This Ultra Slim Recessed Downlight series is perfect for tight spaces such as soffits, insulated, and suspended ceilings. With a very wide 120° beam angle, a very high color rendering index (CRI) of 90+, this fixture can easily be installed in virtually any application where space is at a premium. At just under an inch deep, and IC rated, it can fit even directly below ceiling joists (flush to ceiling). Plug-and-Play Remote Driver is included as well as a Matte White metal trim. Suitable for Indoor Wet Locations and Triac dimming with 5-Level field-selectable Color Temperature.



120V AC



TRIAC DIMMABLE



RECESSED TRIM



IC RATED



8-1/4" CUT-OUT



120° BEAM



INDOOR

L70  
50,000  
HOURS

5 YEAR  
WARRANTY



## SPECIFICATIONS

INPUT VOLTAGE	120V AC
WATTAGE	22 W
LUMENS	1600 Lm
EFFICACY	73 Lm/W
CRI	90+
BEAM ANGLE	120°
DIMMING <sup>1</sup>	TRIAC Dimming
CUT-OUT	8-1/4" Ø

RATINGS	IC, Airtight
ENVIRONMENT	Indoor - Wet
CERTIFICATIONS	cETLus, T24 Compliant
LUMEN MAINTENANCE	50,000 hours
INCLUDES	Remote driver and matte white metal trim
WARRANTY <sup>2</sup>	5 years


<sup>1</sup> Effectively dim down to 10% / See other compatible dimmers on the next page

<sup>2</sup> See published warranty terms for detailed information

## PERFORMANCE

CCT selectable via switch on heatsink

COLOR TEMPERATURE <sup>3</sup>	LUMEN <sup>4</sup>	WATTAGE	EFFICACY	CRI
SW5 (27/30/35/40/50K) <sup>5</sup>	1600 Lm	22 W	73 Lm/W	90+

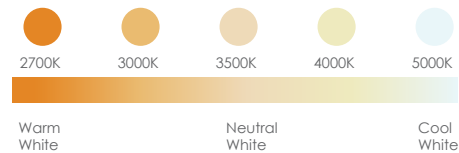

<sup>3,4</sup> CCT within +/-10%

<sup>5</sup> Switchable CCT

## ORDERING INFO

Light Engine with LED, Driver and White Matte Metal Frame

	MODEL	CCT / CRI	FINISH
	RLF-8822	SW5 SW5 - Switchable CCT (27/30/35/40/50) / 90 CRI	WH WH - White



# RLF-8822

8" ROUND LED ULTRA SLIM  
SLIM DOWNLIGHTS WITH WHITE TRIM



Fixture Type
Project
Notes

## TECHNICAL DRAWING

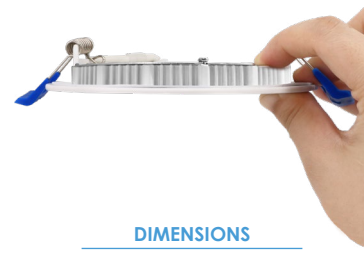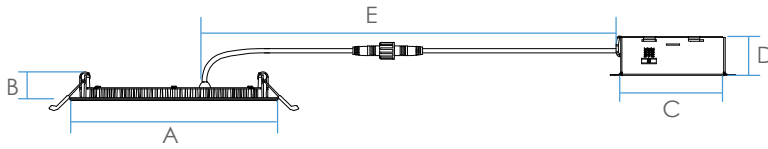

### DIMENSIONS

A	9"	229 mm
B	1"	25 mm
C	3-3/8"	87 mm
D	1-3/8"	35 mm
E	15"	381 mm

## COMPATIBLE DIMMERS

<b>COOPER</b>	SI06P
<b>LEVITON</b>	6621, 6672, IPL06-10Z
<b>LUTRON</b>	PD-6WCL, DVCL-153P, SFTU-5A3P, DMD-LE3-D, CTCL-153P, DV-600P