


CF3101

CRI 80 4000K 3500LM LED CEILING FLUSH

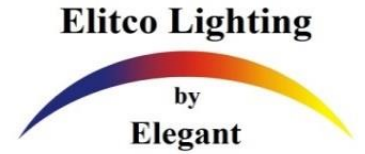

Performance

- LED C.FLUSH is designed to provide 35,000 hours of life
- Energy-saving & Super bright, saving 75% energy compared with traditional troffer
- ETL compliant, for use in Damp locations

Construction

Steel base with white powder coating

- White diffuse Acrylic lens



Installation

- Size: L48"(1219.2mm)W5.5"(140mm)H2.5"(63.5mm)



Specifications

Category	Ceiling Fixture		
Shape	Rectangular		
Bulb Base Type	Integrated LED		
Bulb Base Finish	N/A		
Color Temperature	4000K		
Beam Angle	N/A		
Finish	White		
CRI	80		
Average Life (Hours)	35000		
Estimated Yearly Energy Cost (11 ¢ /Kwh)	4.1	Lamp Type	LED
Life Based On 3Hrs/Day (Years)	31.96	Bulb Shape	N/A
Product Length (Inch)	48"	Dry/Wet/Damp	Damp
Product Width (Inch)	5.5"	Energy Star	NO
Product Height (Inch)	2.5"	Power Factor	0.99
Product Extension (Inch)	N/A	Current	0.32A
Product Weight Per Unit (Lbs)	3.08	Lumen/Watt	103
Dimmable	YES	Warranty (Year)	5
Watts	34	DLC (Yes/No)	NO
Watt Equivalent	300	Input Voltage	100-277V
Lumens	3500	Housing Material	Metal
Certification (UL/ETL/FCC)	ETL	Lens	Acrylic
		Led Type	LM80 Local chips