

CF4002

CRI 80 5000K 2040Lumens LED Ceiling fixture

complete line of residential lighting from ceiling mount, wall sconce, vanity bar to outdoor wall lighting are ideal solution for the replacement of incandescent fixtures.

Performance


- LED light is designed to provide 50,000 hours of life
- Energy-saving & Super bright, saving 88% energy compared
- UL compliant, for use in DAMP locations

Construction

- Die-formed cold -rolled steel with Powder coated paint
- Option with Alabaster or frostd glass

Installation


- LED Ceiling fixture surface mount
- Size:Φ15"(380mm)*H4.8"(131mm)

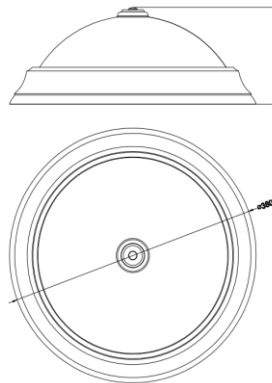

Elitco Lighting
by
Elegant



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

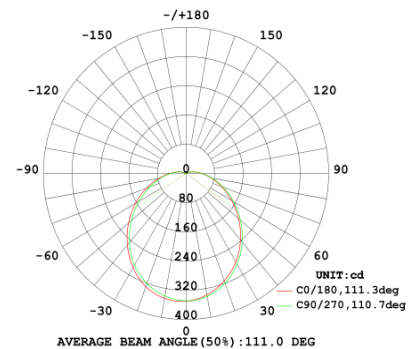

Specifications

Category	Ceiling Fixture	Individual Box Length (Inch)	16.65
Shape	Round	Individual Box Width (Inch)	6.45
Bulb Base Type	Integrated LED	Individual Box Height (Inch)	16.65
Bulb Base Finish	NO	Individual Box Weight Per Unit (Lbs)	4.25
Color Temperature	5000K		
Beam Angle	116°		
Finish	Bronze		
CRI	80		
Average Life (Hours)	50000		
Estimated Yearly Energy Cost (11 ¢/Kwh)	2.89	Lamp Type	Ceiling
Life Based On 3Hrs/Day (Years)	45.66	Bulb Shape	Round
Product Length (Inch)	15	Dry/Wet/Damp	Damp
Product Width (Inch)	15	Energy Star	yes
Product Height (Inch)	4.8	Power Factor	0.9
Product Extension (Inch)	N/A	Current	220MA
Product Weight Per Unit (Lbs)	3.53	Lumen/Watt	85
Dimmable	YES	Warranty (Year)	5
Watts	24W	DLC (Yes/No)	N/A
Watt Equivalent	200	Input Voltage	120V
Lumens	2040	Housing Material	Die-formed cold-rolled steel
Certification (UL/ETL/FCC)	UL	Lens	Glass
		Led Type	EVERLIGHT