


ICAT3N-T24LED-6PK

3" LINE VOLTAGE ICAT NEW CONSTRUCTION IC AIRTIGHT HOUSING

120V-IC AIRTIGHT T24 HOUSING

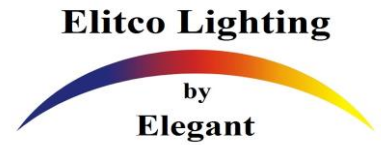

PRODUCT DESCRIPTION

ICAT3N-T24LED housing is designed for IC rated ceilings. Accommodates up to LED 5W MAX TP24.

SPECIFICATIONS:

HOUSING: 4 1/6" profile for ceilings. Pre-wired. 0.37" steel housing adjusts up to 1 3/4" ceiling thickness. Trim is secured with torsion wing spring/ standard coil springs. Designed to be installed in new construction applications. IC rated housing may have direct contact with insulation.

AIR FLOW RESTRICTION: Airtight models are designed to restrict air flow from room into plenums in compliance to the WSEC- Washington State Energy Code (less than 2.0 CFM-Cubic Feet per Minutes)

MOUNTING: Supplied with (2) 25" adjustable bar hangers. Bar hangers equipped with screw spike which for secure mounting in wood joints. Brackets may be flattened out to accommodate 27" flat bar hangers.

JUNCTION BOX: Pre-wired, galvanized steel J-box (25 cubic inch) with (4) knock -outs. Strain clamps and ground wire. Equipped with safety standard thermal protector rated for 90 °C .

LABELS: UL/CUL listed (UL listed number: E486665).

