


RE318BN-12PK

6" ROUND GIMBAL RING TRIM
120V PAR38 Gimbal TRIM

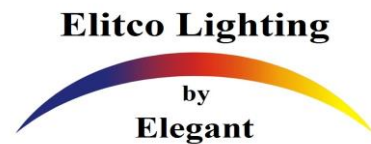

PRODUCT DESCRIPTION

6" ROUND GIMBAL RING TRIM

To be used in line voltage applications.

LAMPING: Accommodates a PAR38 E26 100 W Max. Please see housing for maximum wattage allowed according to selection.

Electroplated finish are anodized for abrasion resistance. Steel metal clips secure to housing.

DIAMETER: 8 1/16" x 1 1/2"

FINISH: Brushed Nickel (BN)

