
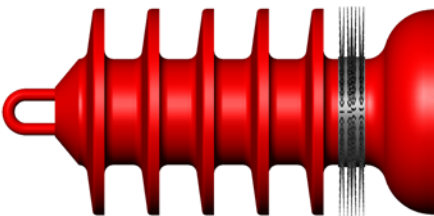
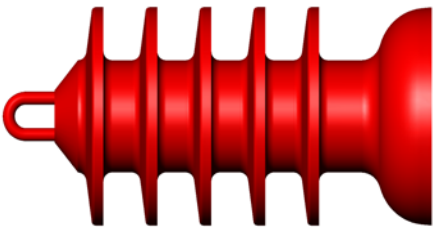


ALL URETHANE

PURGER I™ - solid cast

2-36" (51-914mm)

The Purger™ Series pig is an incredibly tough, all-urethane pipeline pig that requires absolutely no maintenance and is an excellent pig for product evacuation. The Purger I™ is an extremely efficient batching, cleaning and displacement pig. Its multi-disc design ensures that sealing elements are always centered in the pipeline, resulting in consistent wear over time.

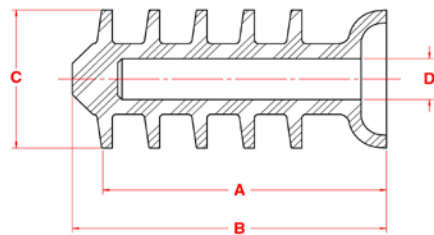

Size	A	B	C	D	Weight	Part #
2"	4.500	5.000	2.250	0.500	0.5	71-0185-02
3"	6.750	7.500	3.375	1.000	1.0	71-0185-03
4"	7.500	8.500	4.375	1.250	2.0	71-0185-04
6"	11.500	13.250	6.375	1.500	7.0	71-0185-06
8"	15.250	17.000	8.625	3.000	15	71-0185-08
10"	17.500	19.750	10.625	3.875	26	71-0185-10
12"	20.500	23.000	12.500	4.750	44	71-0185-12
14"	23.500	26.000	14.250	5.750	56	71-0185-14
16"	25.750	28.500	16.375	6.750	84	71-0185-16
18"	29.000	35.000	18.000	7.750	92	71-0185-18
20"	30.000	37.000	20.375	9.750	118	71-0185-20
22"	32.500	36.000	22.125	12.500	183	71-0185-22
24"	35.750	39.750	24.000	12.500	208	71-0185-24
30"	44.000	52.000	30.000	12.875	337	71-0185-30
36"	48.500	61.000	36.000	18.625	505	71-0185-36

*Part numbers shown are for 85 Durometer (62 and 72 also available)

Features & Benefits:

- Lightweight – no metal components.
- Improved sealing as hollow core allows pressure to expand the pig body.
- Multiple seals provide excellent product interface.
- Standard hollow core to accommodate an electronic transmitter.

Options Available:

- Solid core.
- Variety of durometers.
- Wrap brushes in the following types and trim materials:
 1. Trim types – flat wire.
 2. Trim material – carbon steel, stainless steel or plastic.
- Magnets can be used to provide a change in magnetic field required by non-intrusive pig signaler detection devices. Trip magnets are available for 4" - 36".
- Rattler 16" – 36" sizes only.
- Custom lengths available on request.

Designed to negotiate 1.5D bends, the Purger I moves reliably through complex lines.

60-63 DUROMETER
Very soft and pliable

70-75 DUROMETER
Somewhat firm, but quite flexible

80-85 DUROMETER
Firm with fair flexibility
Most common for solid-cast pigs